


1




FOLLOW STAND  
MOUNTING INSTRUCTIONS


or

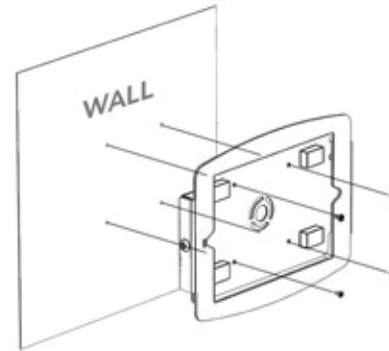


2

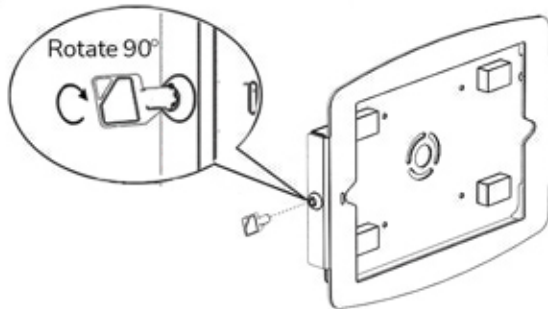


3

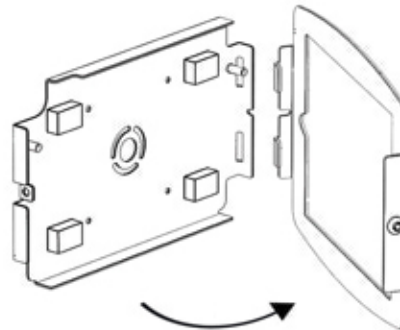

4

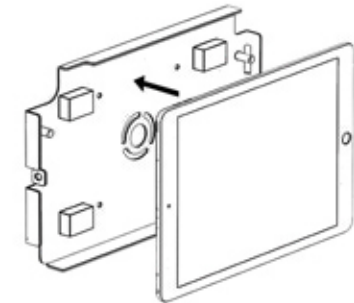


5

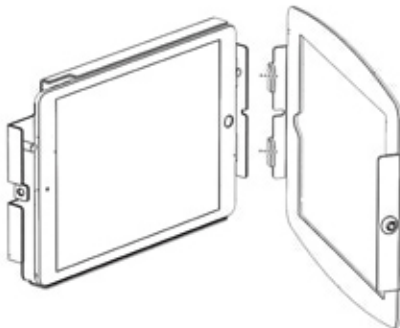

6




7

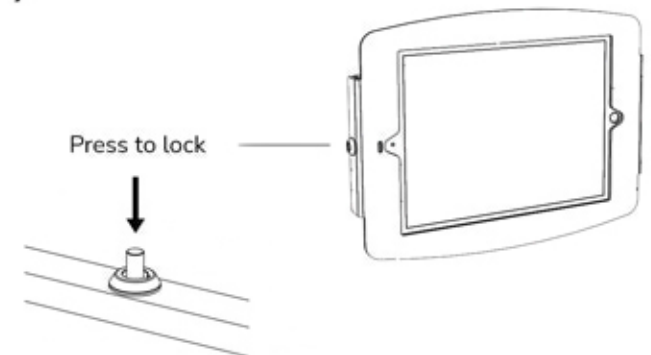


1

TIGHTEN VESA MOUNTING  
PLATE AT 90°

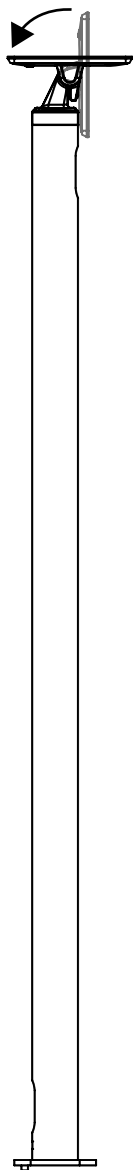


2

TURN STAND ONTO VESA  
MOUNTING PLATE AND PLACE ON FLAT SURFACE.  
PLACE BOTTOM PLATE  
AND ALIGN WITH HOLE USING LOCATOR PIN

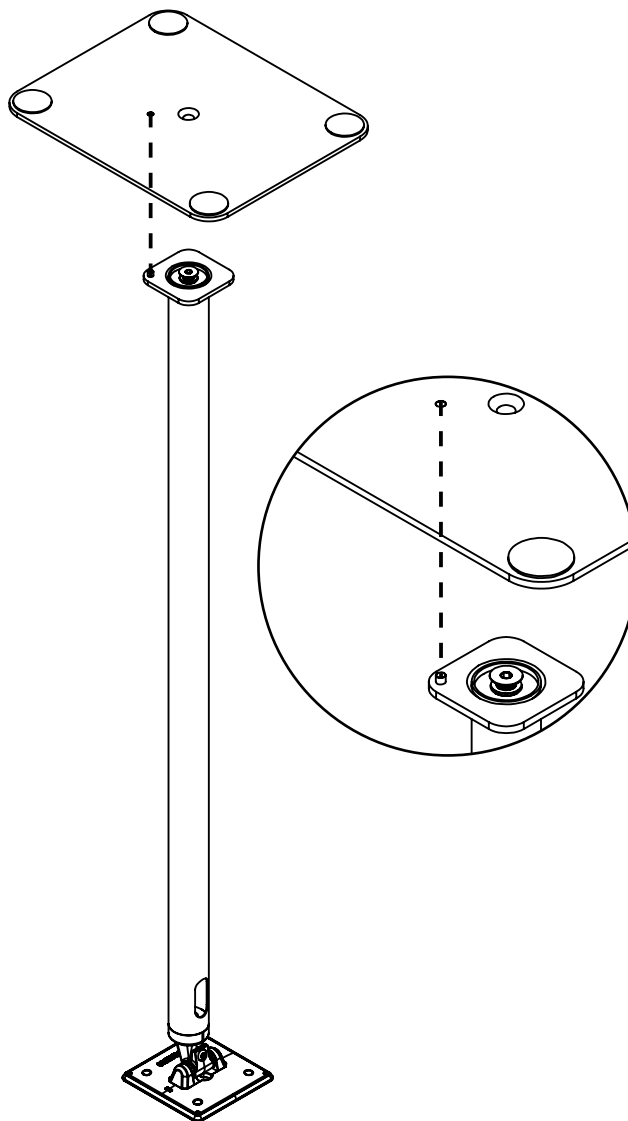


3


INSTALL THE BOTTOM PLATE USING M10 X 25mm  
CONICAL ALLEN SCREW (PROVIDED)  
AND 6mm ALLEN WRENCH (PROVIDED)

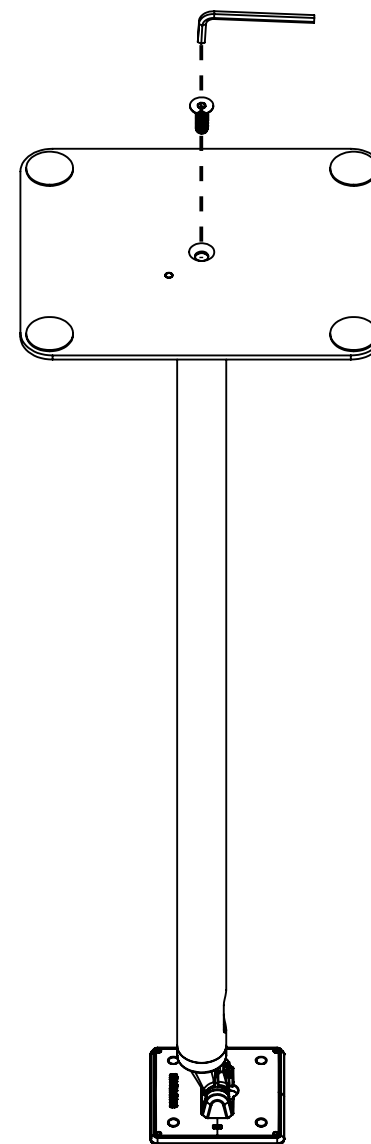


4 Free Standing or Floor Mounting

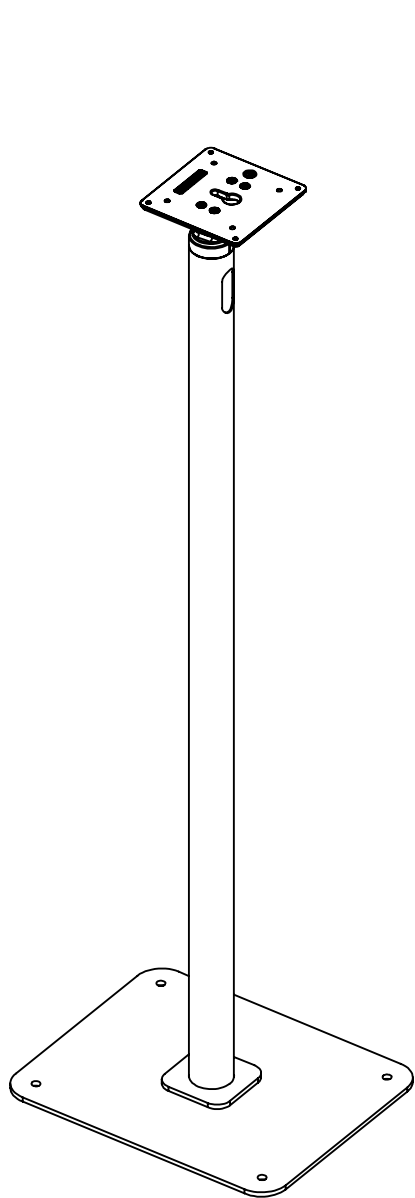

REMOVE RUBBER PLUGS

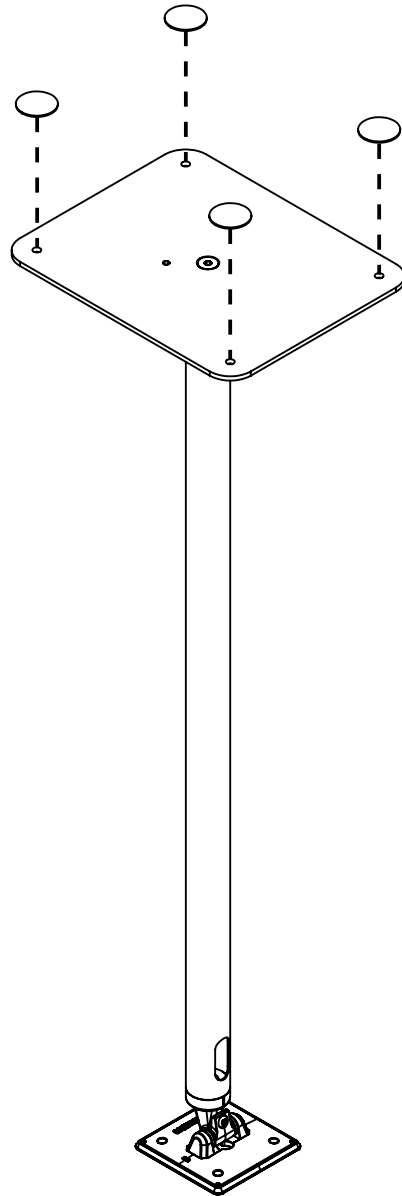


SCREW BOTTOM PLATE TO THE FLOOR  
(SCREWS NOT PROVIDED)

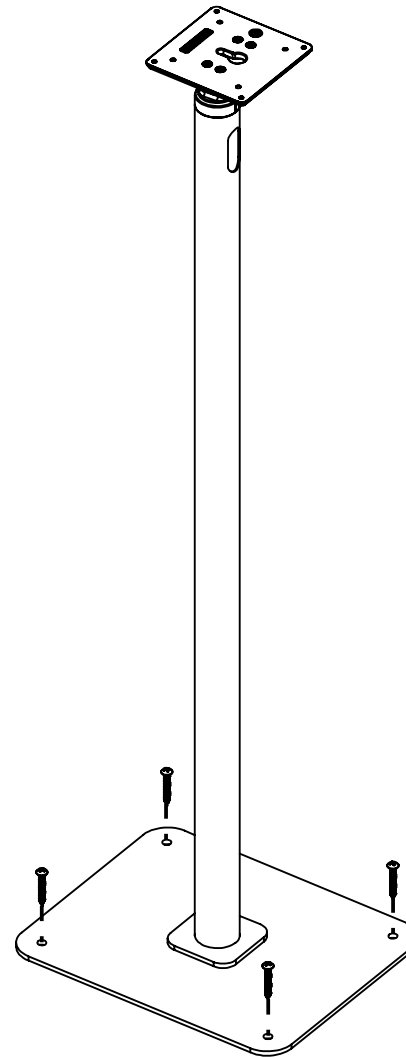

5

ROUTE CHARGING CABLE  
THROUGH THE STAND AS SHOWN

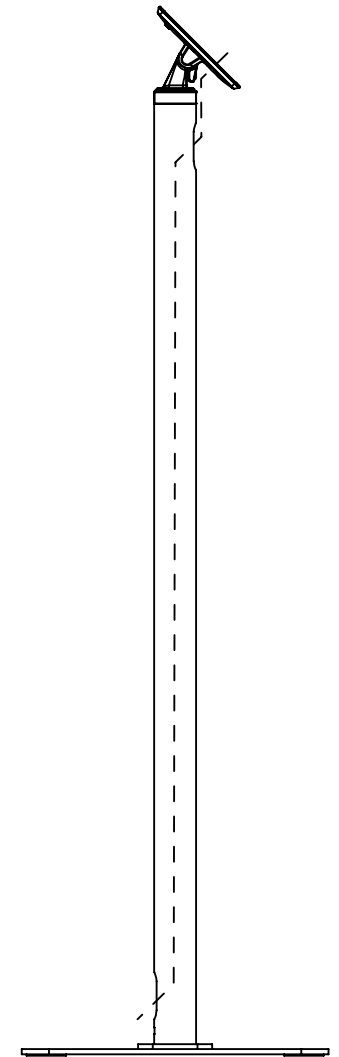

- 6

INSTALL ENCLOSURE/VESA MOUNT  
TO STAND USING M4 X 8mm  
PHILLIPS PAN HEAD SCREWS (PROVIDED)
- 7

INSTALL THE ENCLOSURE TOP  
PLATE/VESA MOUNT PER  
THEIR INSTRUCTIONS

Tilt Tension  
Adjustments

In The Box


ADJUST HINGE  
TENSION USING  
T30 TORX  
L-WRENCH  
(PROVIDED)

M4 X 8mm  
Phillips Pan Head  
Screws




M10 X 25mm  
Conical Allen  
Screw

6mm Allen Wrench



Bottom Plate



Swift Pole

